


LUMIPLUS ESSENTIAL FLAT PROJECTOR RGB 1100



FLAT PROJECTOR RGB +RC 1100lm 75825 	Consumption	22 W (29 VA)
	Luminous flux	1.100 lm
	Rated Voltage	12 V AC
	IP68. Cable not included. Must always be installed submerged in water. Works with remote control code 75773 (included).	
FLAT PROJECTOR RGB 75826 	Consumption	22 W (29 VA)
	Luminous flux	1.100 lm
	Rated Voltage	12 V AC
	IP68. Must always be installed submerged in water. Works with remote control code 75773 (not included).	

VOLTAGE:	12 V AC
FREQUENCY:	50/60 Hz
SERVICE LIFE:	L70-50,000 h
MAX. WATER TEMPERATURE:	40 °C
MAX. INSTALLATION DEPTH:	0,4 m
MAXIMUM WATER TREATMENT VALUES:	Chlorine: 2 mg/l Bromine: 5 mg/l Salt chlorinator (NaCl): 6 g/l Pool water pH: 7.2 and 7.6
MATERIALS:	Polyamide

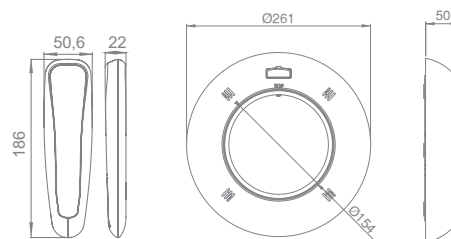

PACKAGING AND PALLETIZATION

Volume/Single box (m ³)	0,005
Weight/Single box (kg)	2,28
Units/Standard box	6
Volume/Standard box (m ³)	0,033
Weight/Standard box (kg)	13,68
Units/Pallet	336
Volume/Pallet (m ³)	2,58
Weight/Pallet (kg)	824,88

